

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date
13 October 2005 (13.10.2005)

PCT

(10) International Publication Number
WO 2005/095199 A1

(51) International Patent Classification⁷: **B63B 35/44**, 5/14, F24D 3/18, 11/02

(74) Agents: LENNEFORS, Stefan et al.; Zacco Sweden AB, P.O. Box 23101, S-104 35 Stockholm (SE).

(21) International Application Number:
PCT/SE2005/000485

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date: 1 April 2005 (01.04.2005)

(25) Filing Language: Swedish


(26) Publication Language: English

(30) Priority Data:
0400898-3 2 April 2004 (02.04.2004) SE

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: FLOATING STRUCTURE IN THE SHAPE OF A CONCRETE COFFERDAM AND A METHOD FOR MOULDING THE CONCRETE COFFERDAM

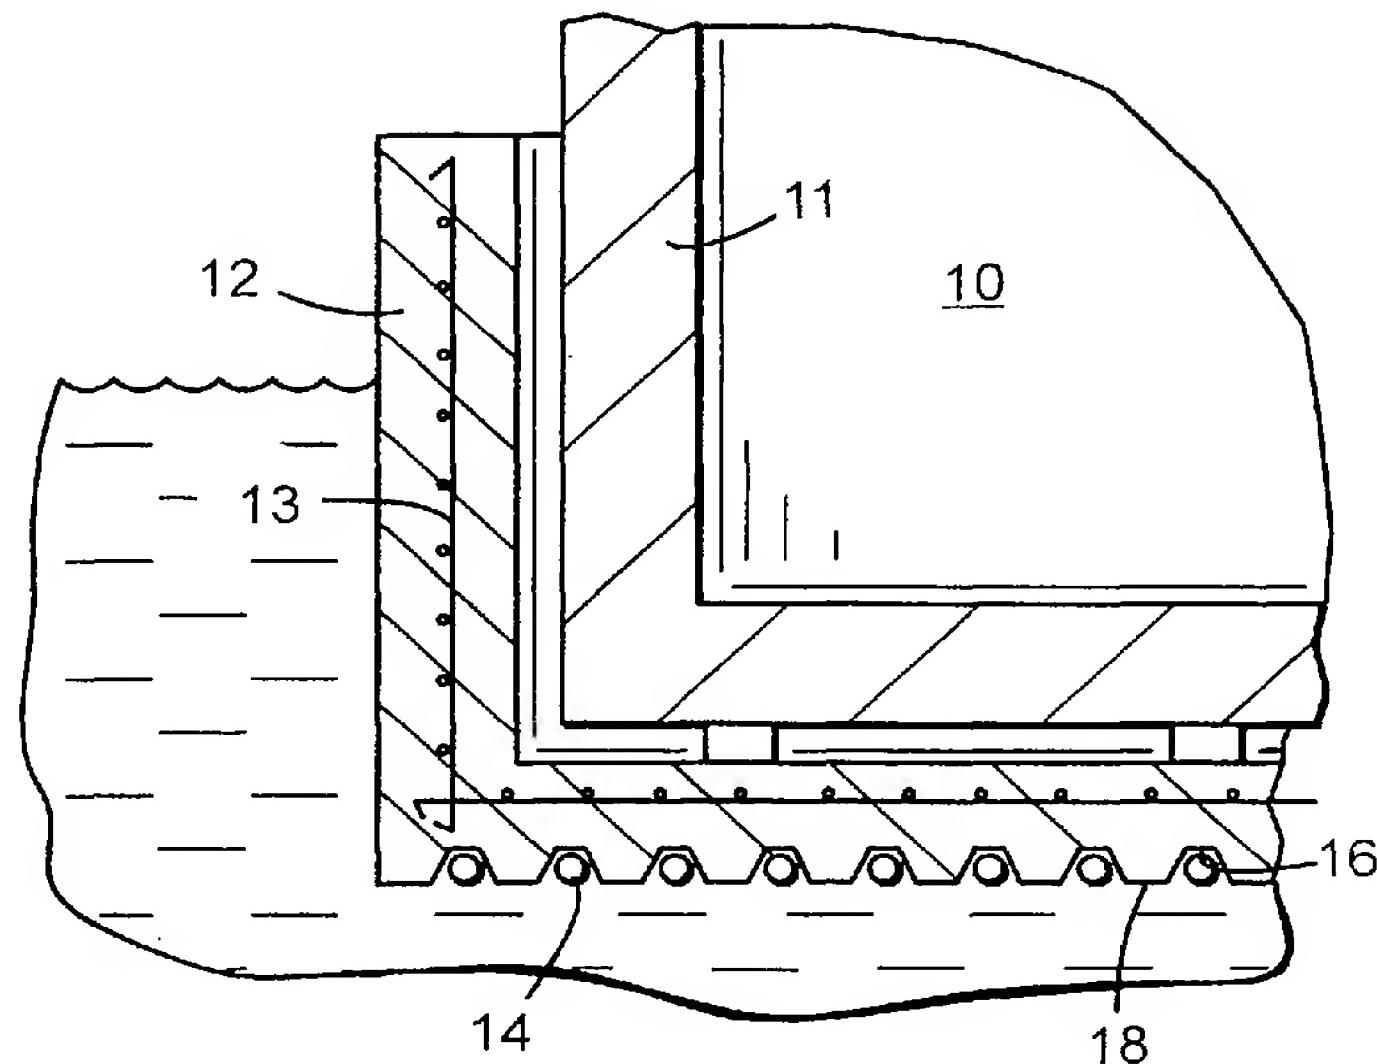

(57) Abstract: The present invention relates to a floating structure comprising at least a closed space (10), a hull in the shape of a concrete cofferdam (12) having an external delimiting surface intended to be exposed to surrounding water, and a function for heating of the space comprising a heat pump connected to a closed circuit for circulating heat transport medium. At least one collector hose (14) for the circulating heat transport medium is provided in recesses in the concrete such that the cross section of the collector hose is located entirely within an outer outline of the cofferdam, whereby heat from surrounding water is absorbed by the collector hose and used for heating of the space. The invention also relates to a method of moulding a concrete cofferdam (12) adapted to be a hull of a floating structure.

WO 2005/095199 A1



Published:

— *with international search report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.